




**ALLETT**

# Buffalo 34

Award Winning Cylinder Mowers

This superb lightweight sports ground mower is not only perfect for soccer pitches where compaction is a problem, but also for large areas of formal lawns, where the collection of grass and a beautiful striped effect are required. An optional trailing seat can be used to increase efficiency on larger areas.

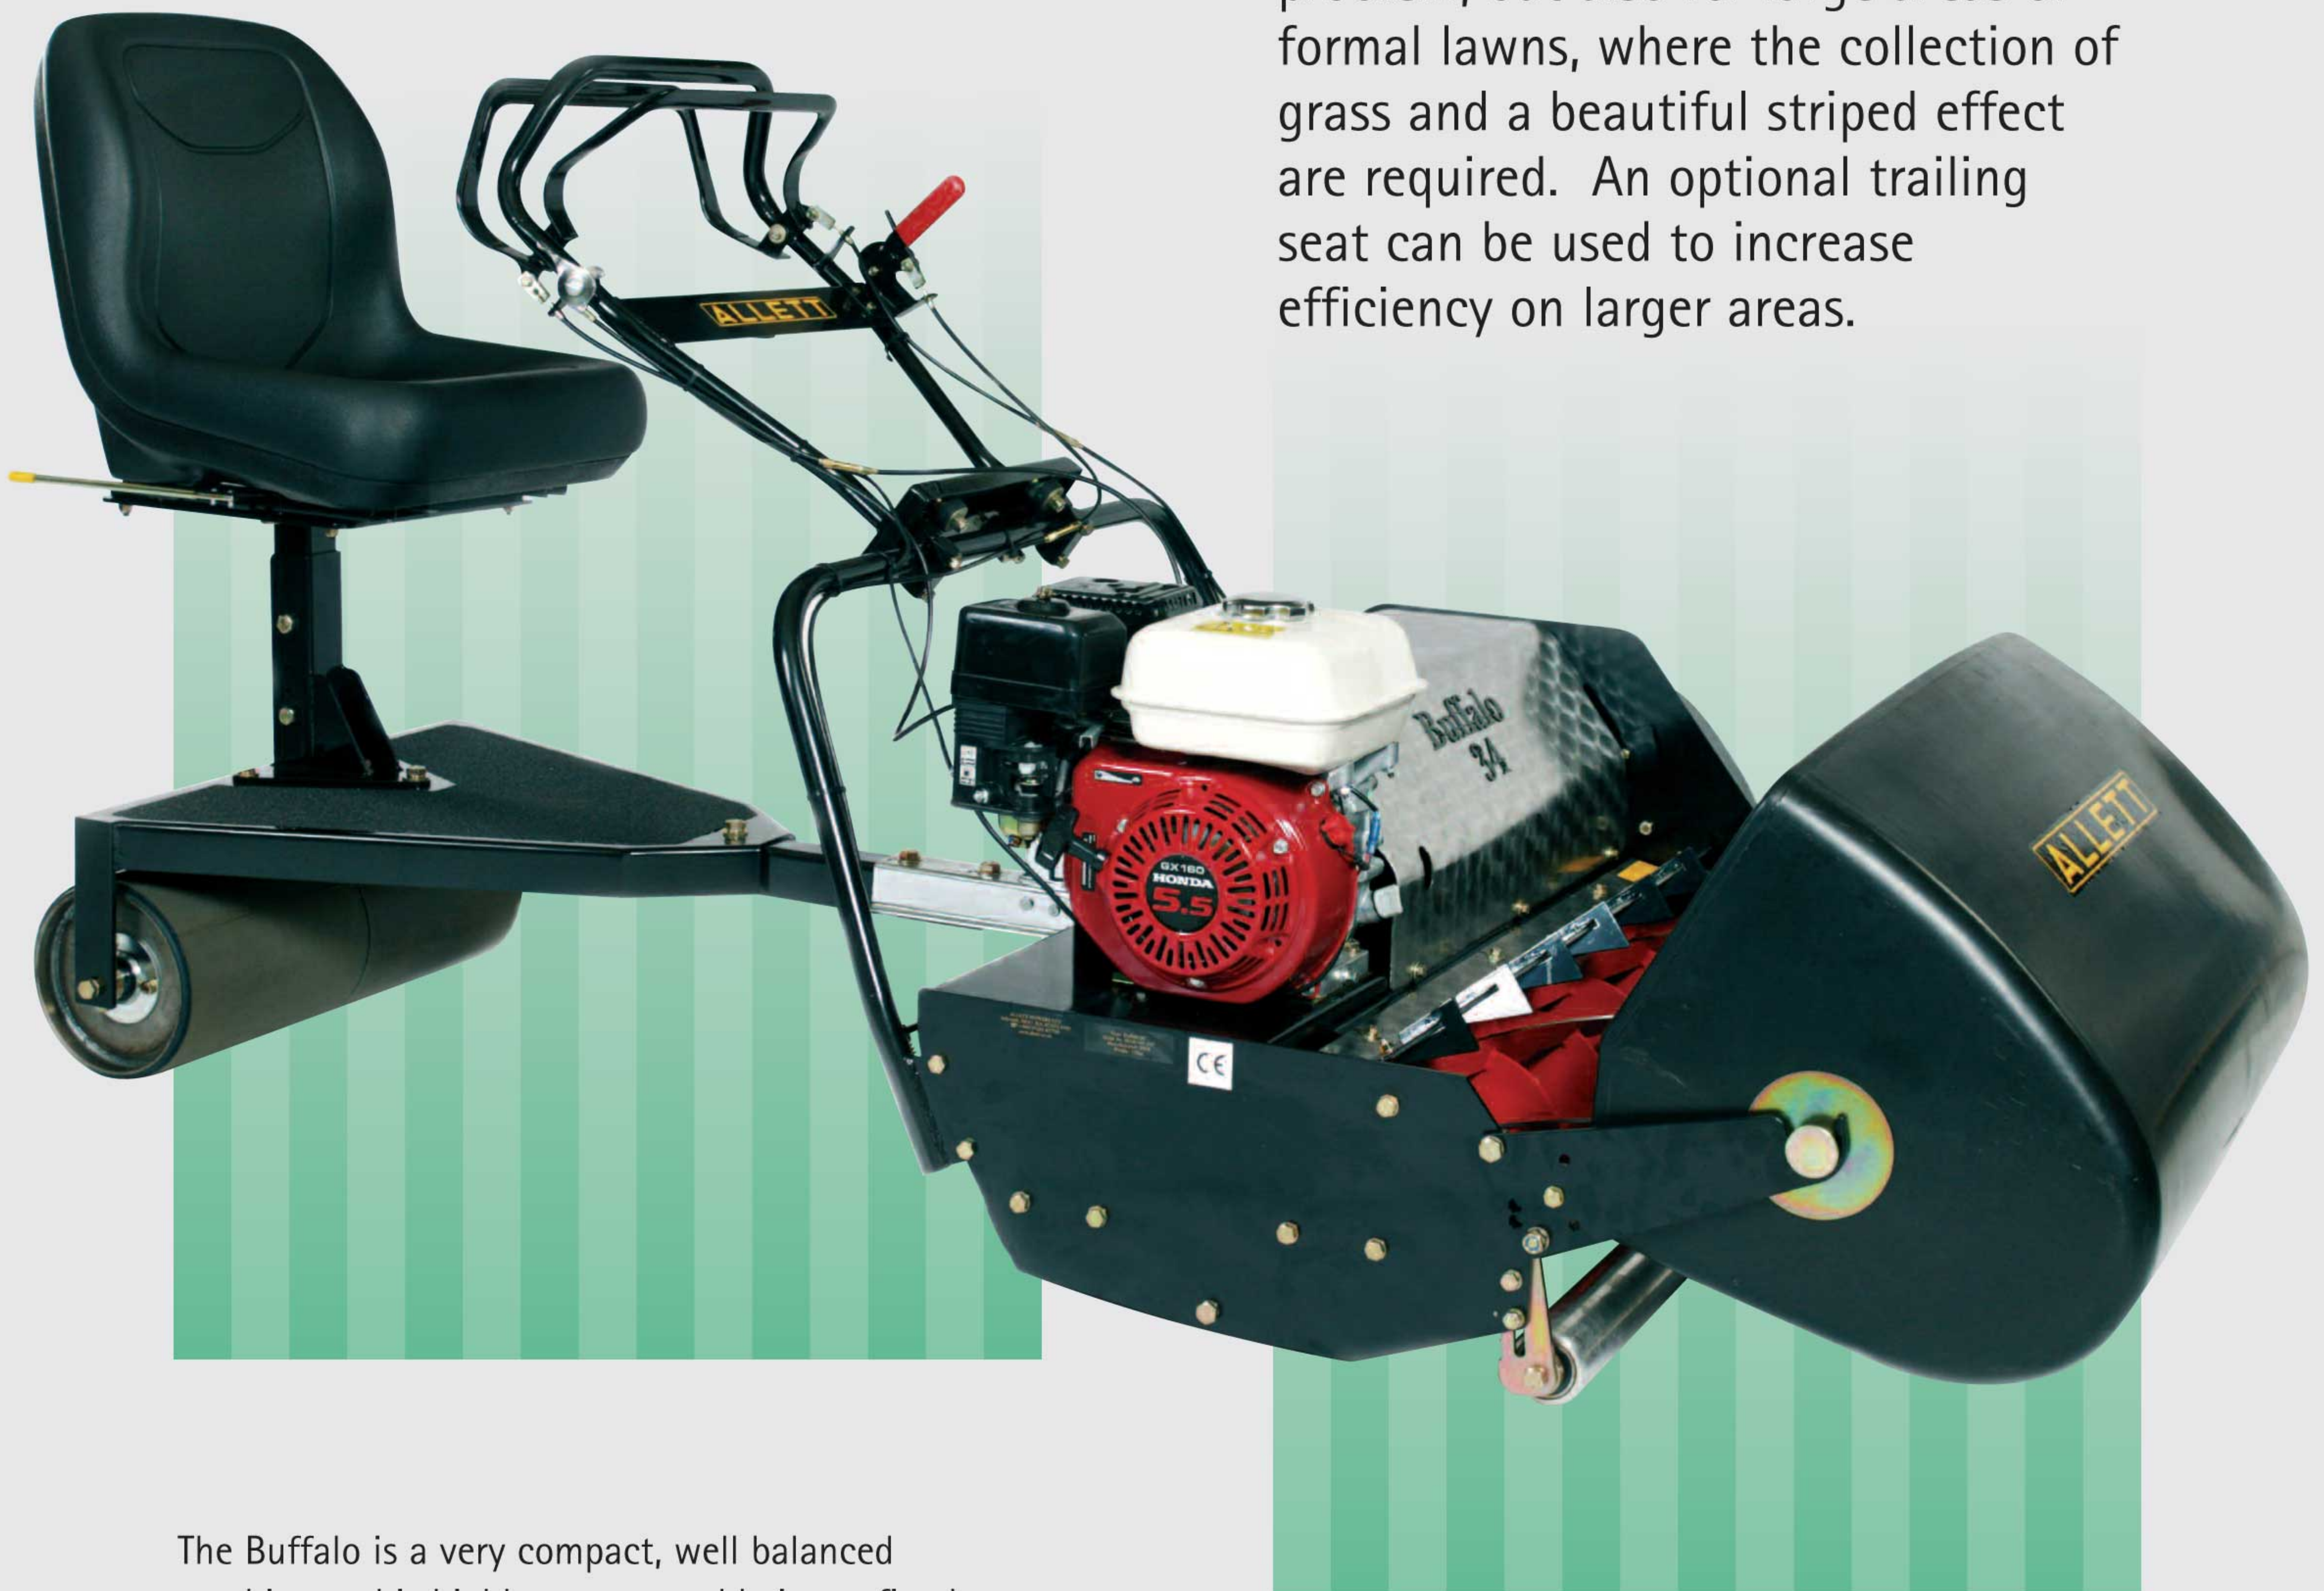

The Buffalo is a very compact, well balanced machine and is highly manoeuvrable in confined areas. The mower has a low profile for good forward visibility. Despite its light weight, the Buffalo 34 is very robust and both long life and easy servicing are assured.

The rear roller is in three sections and is rubber covered for good traction and silent running over hard surfaces. Internally, the rear roller is fitted with hardened steel differential gears, which run in a sealed oil bath. The optional trailing seat also has a rubber covered roller.

In common with all other Allett mowers, height and cutter adjustments are very easy on the Buffalo 34. Designed to run on low engine revs., the machine is very smooth, quiet and economical to operate.



The large diameter cutting cylinder gives the machine the ability to cut long grass, even in wet conditions, which leave other mowers in the shed!

**Call us now and ask for a demonstration.**

---



# Buffalo 34

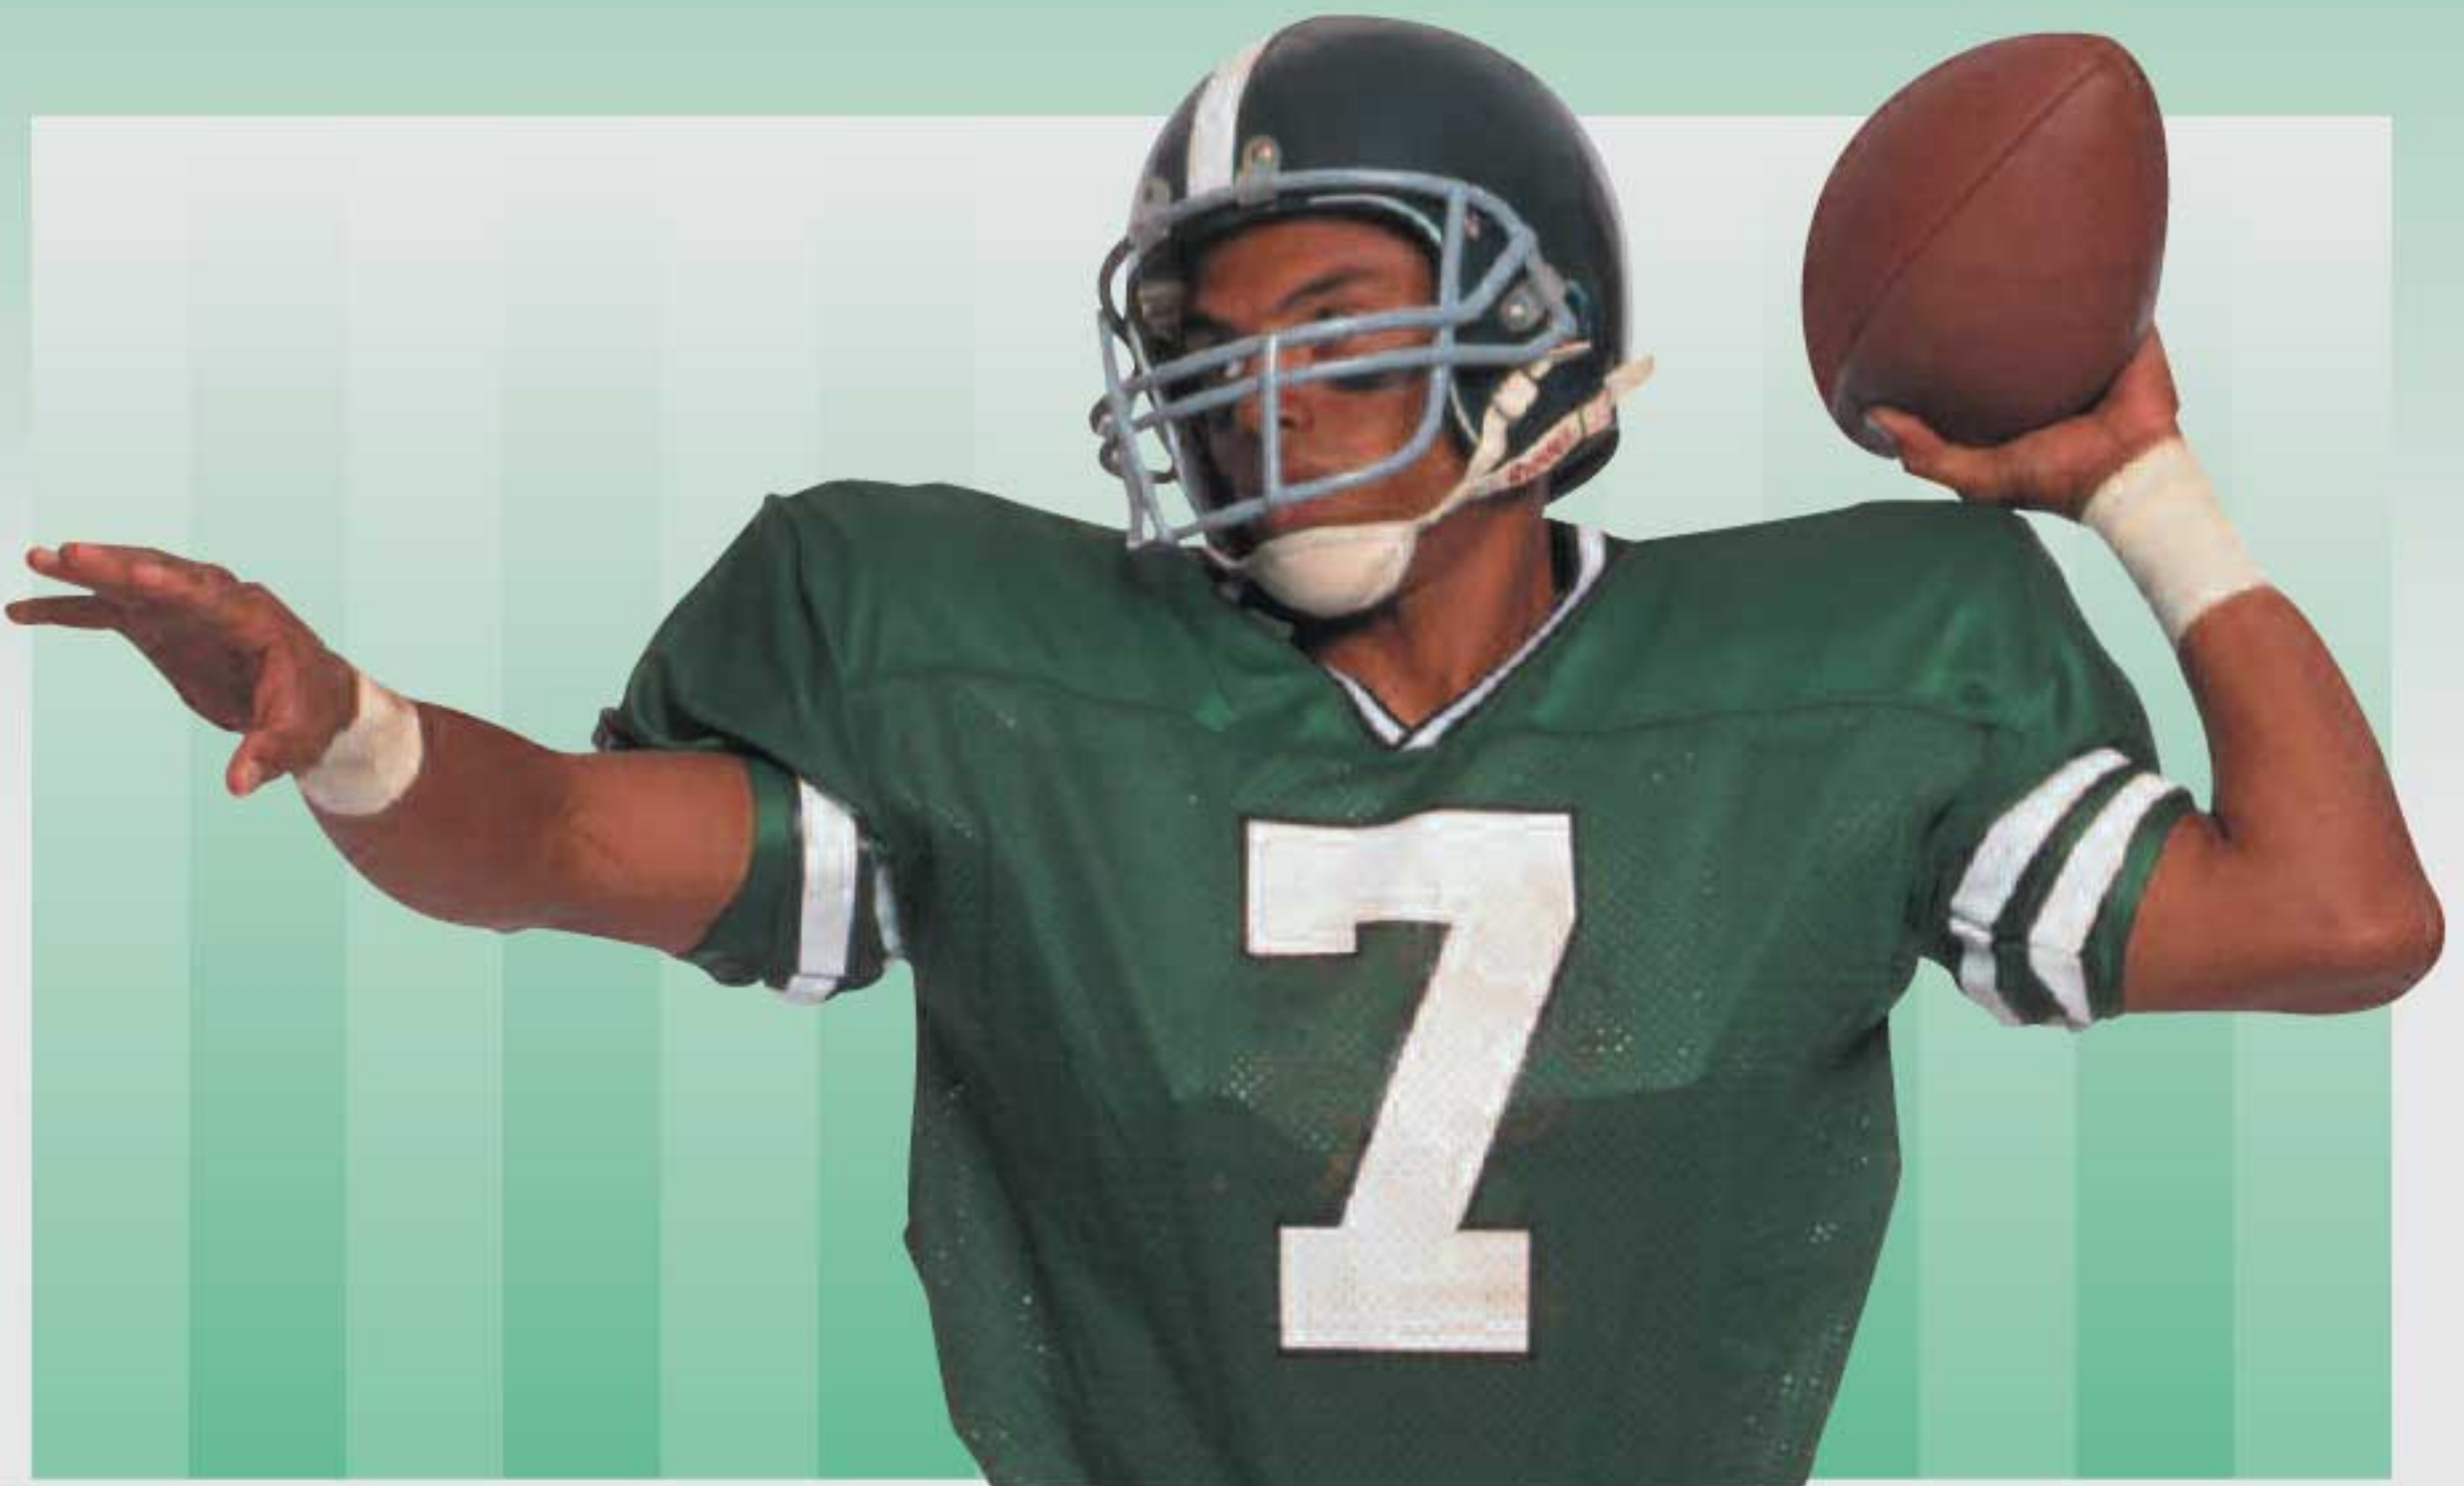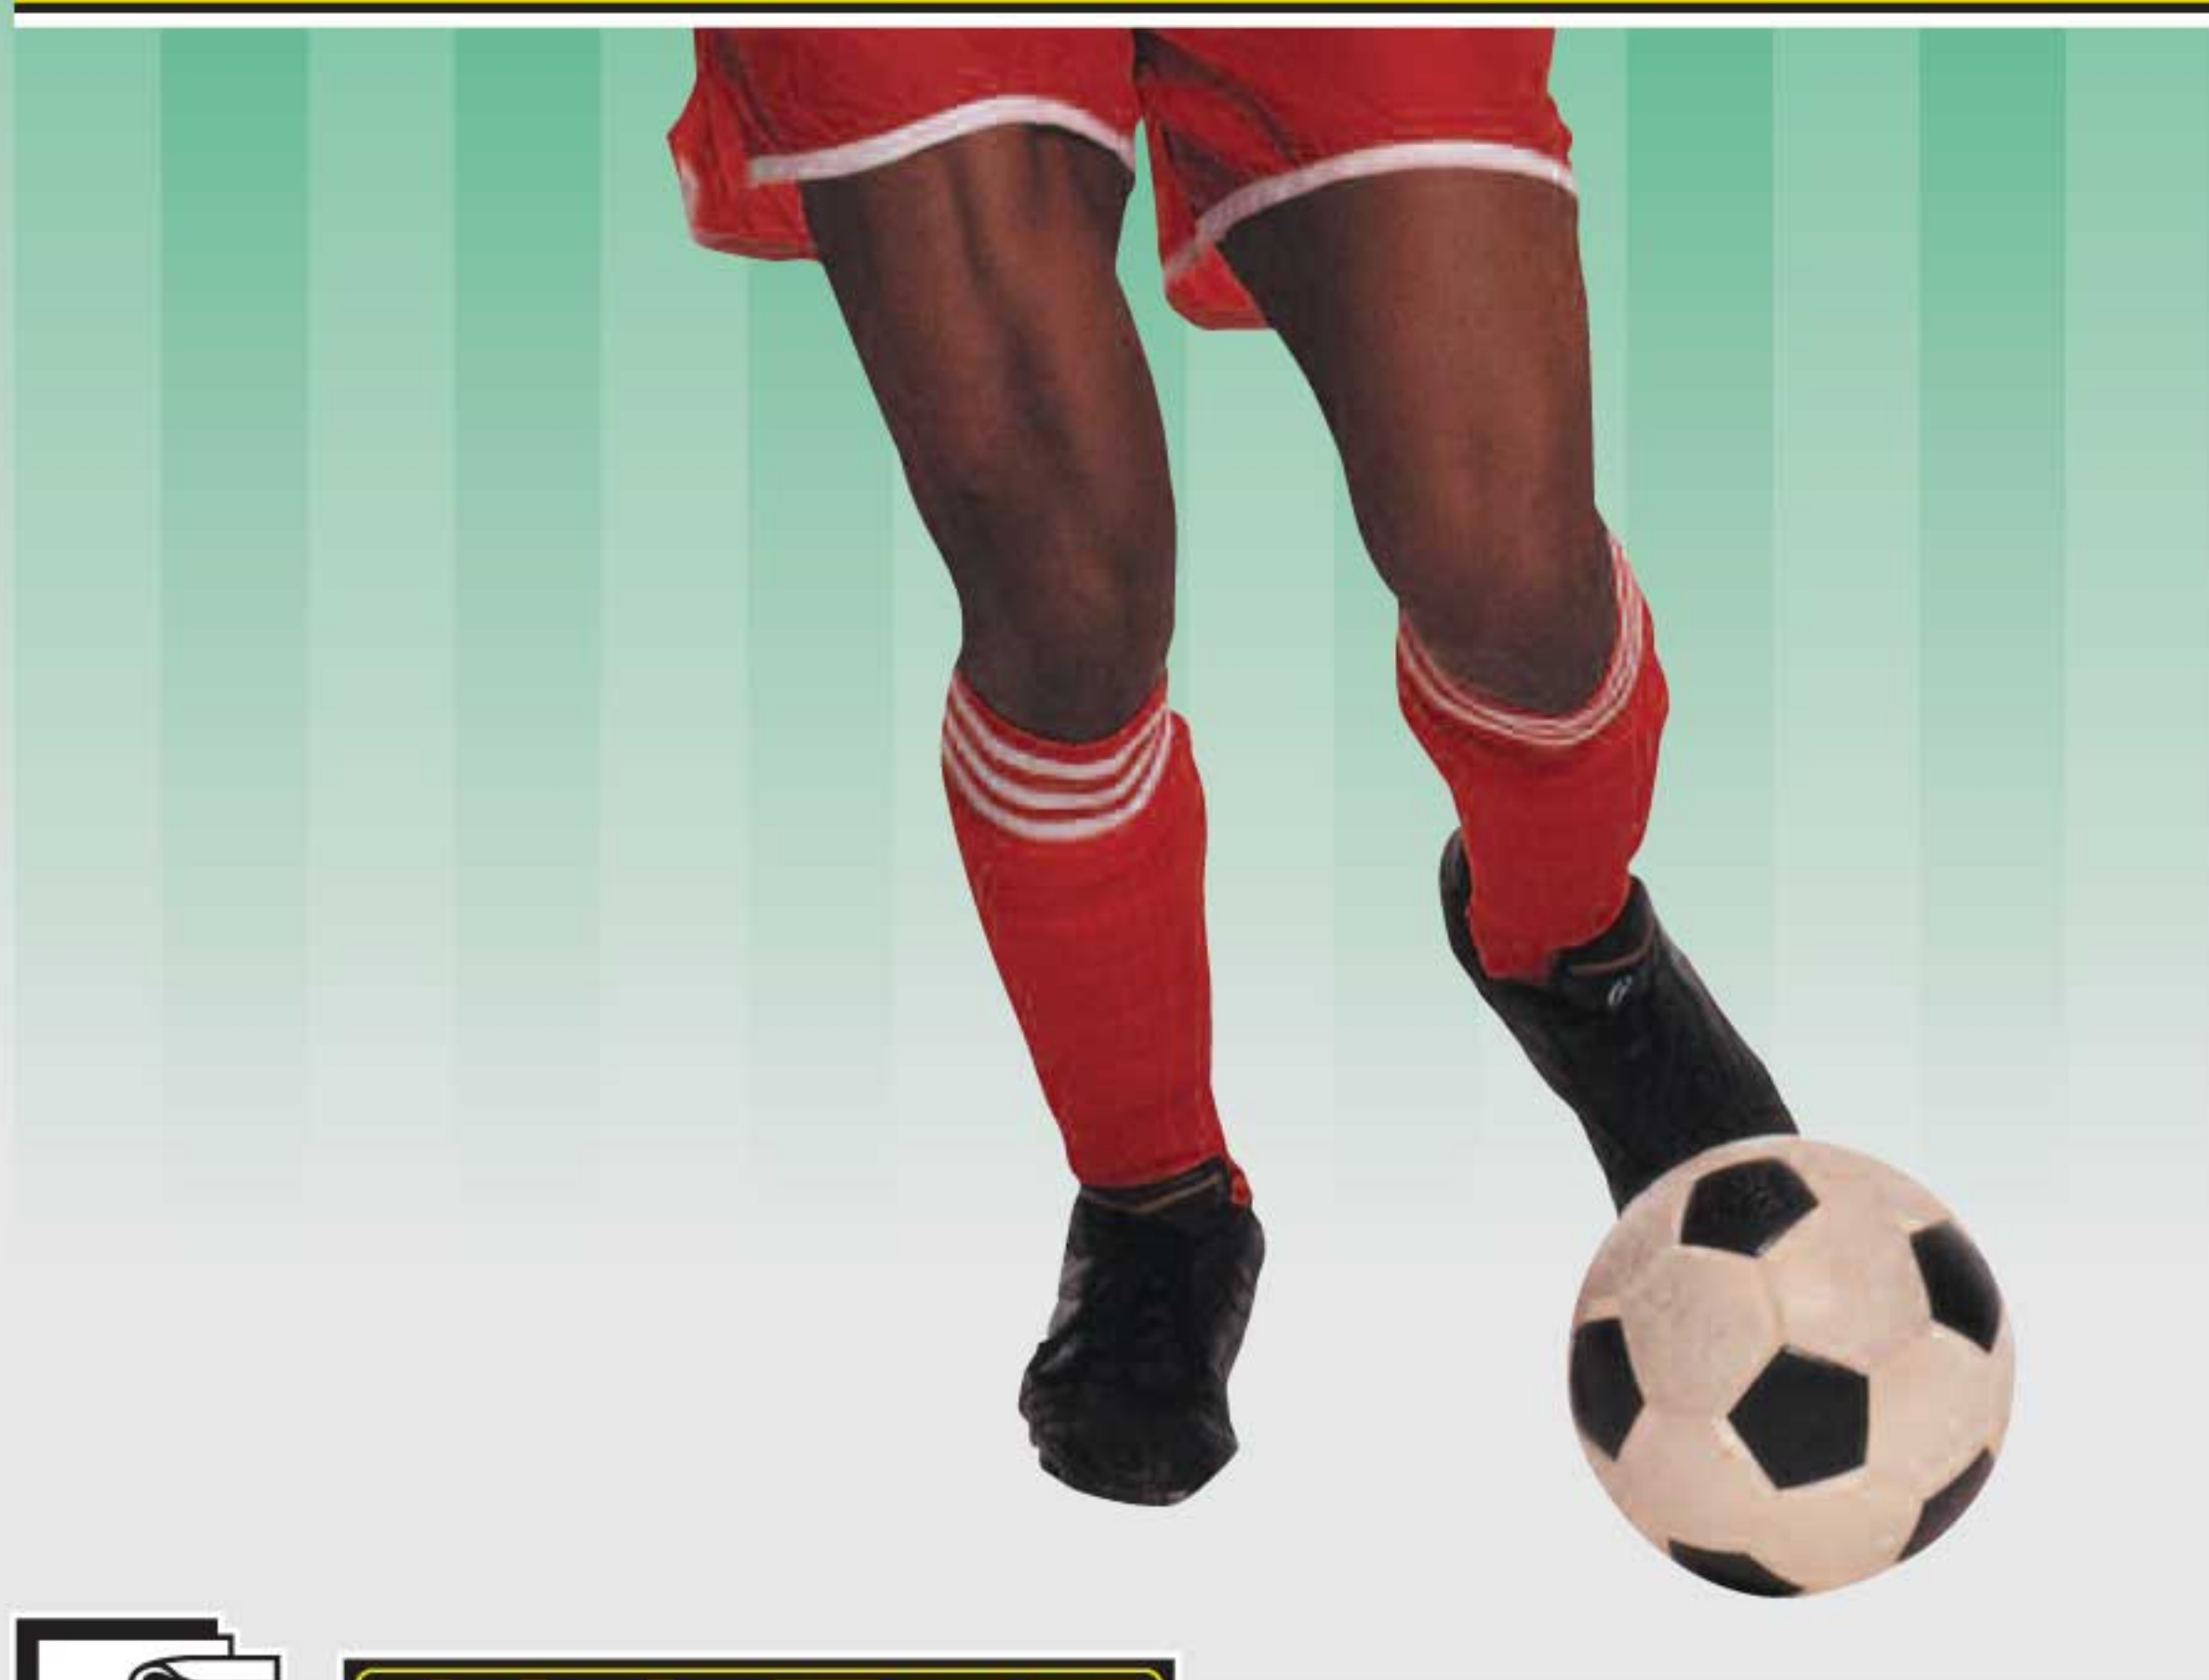

## Specifications



Cutting Width	863.6mm (34")
Overall Width	1041mm (41")
Weight	180kg (397lb)
Engine	Honda GX160 5.5hp ohv petrol
Overall Height	1010mm (40")
Overall Length	1280mm (50")
Rate of Cut	88 cuts per mtr (80 cuts per yard / 2.22 cuts per inch)
Height of Cut	10mm to 40mm (3/8" to 1.5")
Drive Clutch	Handle mounted lever operating tight and loose V belt via a cable
Cutter Clutch	Handle mounted lever operating tight and loose triple V belts via a cable
Rear Roller	Three piece steel sections, rubber covered
Differential	Hardened steel gears running in a sealed oil bath
Front Roller	Aluminium running on sealed bearings
Cylinder	8 bladed, all welded, high carbon spring steel, hardened and tempered to 45HRC Mounted on greaseable bearings
Bottom Blade	Manufactured from EN8 hardened and tempered to 45HRC
Handle Bar	Adjustable with anti-vibration mountings
Grassbox	Rotationally moulded plastic with steel reinforcing strip
Optional Extras	Trailing seat