



ALLETT

Regal 36 & 42

The Ultimate Sports Field Mower

The Allett Regal sets the standard for this type of mower and is in use at 5 test match cricket grounds in England together with a large number of prestigious sports stadia throughout the world. The 42" model is becoming increasingly popular due to its higher productivity and lower ground pressure.



Built to the highest standards, this machine combines exceptionally high work rate, superb finish and remarkably easy operation. Power steering combined with the hydrostatic drive makes the machine very manoeuvrable, allowing infinitely variable forward and reverse speeds to be selected. This also has the added advantage of providing unlimited cuts per yard.

The rear roller is in three sections and is rubber covered for good traction and silent running over hard surfaces. Internally, the rear roller is fitted with hardened steel differential gears, which run in a sealed oil bath. The optional trailing seat also has a rubber covered roller.

The Regal is fitted with a high specification hydrostatic unit (the Eaton model 11) and combined with a Honda 11HP engine, this transmission system delivers all the power you need. Easy height and cutter adjustment make it simple to maintain a perfect cut. It will give an unrivalled finish on sports fields and large lawns.


Call us now and ask for a demonstration.

Regal 36 & 42

The Ultimate Sports Field Mower



Specifications

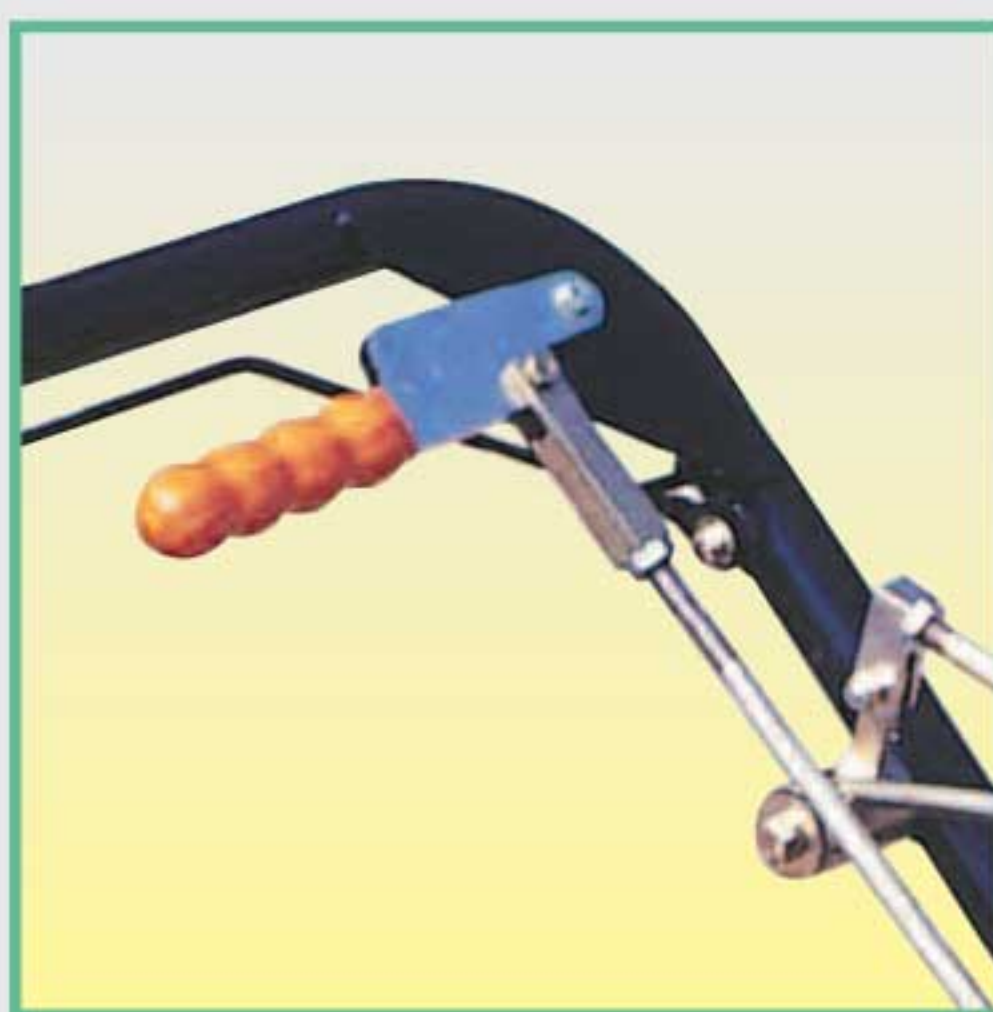

	36" Regal	42" Regal
Cutting Width	914mm	1067mm
Overall Width	1118mm	1270mm
Weight	352kg (702lb)	376kg (744lb)
Engine	Honda GX340 11hp	Honda GX340 11hp
Transmission	Model 11 Eaton Hydrostat operated via cable	
Overall Height	1016mm	
Overall Length	2083mm	
Rate of Cut	Variable	
Height of Cut	6.5mm to 44.5mm	
Cutter Clutch	Handle mounted lever operating tight and loose triple V belts via rods	
Rear Roller	Three piece steel, rubber covered with full differential running in an oil bath	
Front Roller	All steel on sealed bearings	
Cylinder	6 bladed, all welded, high carbon spring steel, hardened and tempered to 45HRC Mounted on greaseable bearings	
Bottom Blade	Manufactured from EN8 hardened and tempered to 45HRC	
Grassbox	Rotationally moulded plastic with deflector hood and steel lifting bar	
Power steering	Rod operated brakes, fitted as standard	
Optional Extras	Trailing seat	